


TSG52 GULLY FOR TILED FLOORS

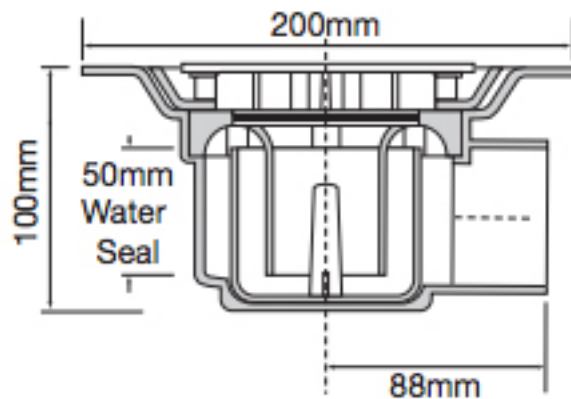

Description	Reference
TSG52 Square Tile Gully	08GT52-S

TSG52 GULLY

- 2 part, 50mm water seal trapped gully.
- Flow rate in excess of 40 litres per minute.
- 150mm stainless steel square option for use with floor tiles, (8mm depth).
- 2" BS EN 1329-1:2000 Solvent Weld Horizontal Outlet.
- Supplied with 2" x 1½" socket reducer.
- Tiled or stone floor gully suitable for concrete and suspended timber floors.
- Manufactured in ABS to the highest quality.
- Ideal for showers in domestic wet rooms, disabled and student accommodation, bathroom pods, retirement and care homes, hotels, hospitals and sport and leisure.